

# INSTALLATION INSTRUCTIONS

Item #1199

11/24/2012

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

## ASSEMBLING THE FIXTURE (Fig.1)

1. Carefully remove the fixture from the carton and check that all parts are included as shown in the illustration.
2. Shut off power at the circuit breaker and remove old fixture including the mounting hardware.
3. Place the Center Pipe (A) to the Coupling (E) and secure them with Adjust Nut (B). Pull the wires until taut.
4. Connect the Cables (F) and (H) to Joints (G) and (I) on the arms to all location (shorter one on second tier and longer one on bottom tier) as shown in Fig.1, and adjust the Cables in the proper position by Adjust Nut (B).
5. Place the Shade (D) onto the socket, and secure with Screw Shell (C) tightly.
6. Install the light bulbs in accordance with the fixture's specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!).**

## HANGING THE FIXTURE (Fig. 2)

**IMPORTANT:** For a safe and secure installation, these fixtures must be installed by means of support that is independent of the outlet box.

### SUGGESTED INSTALLATION:




7. Provide a 1/4 IPS pipe with one end securely mounted to a beam or a structural member. The other end should protrude through the center of the outlet box as shown.
8. Assemble the ceiling loop, nipple, nuts and hickey to center 1/4 IPS support pipe and adjust overall length to allow the ceiling loop to hold the canopy flush to the ceiling. When the adjustments have been completed, secure the three nuts, as shown.
9. Attach the chain to the fixture loop. Slip the lock collar and canopy over the upper end of the chain. Open the end link of chain and lift the fixture to attach to the ceiling loop and secure the link.
10. Lace the fixture wires, ground and safety cable through the chain and loop, exiting through the side of hickey. Run cable through the top of the outlet box and secure to Strain Relief Bushing

## CONNECTING THE WIRES (Fig. 3)

11. At this point, connect the electrical wire as shown in figure 3, making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect the fixture's Ground Wire to it. Otherwise, connect the fixture Ground Wire directly to the outlet box using the Green Screw provided.
12. Tuck these wire connections neatly into the ceiling junction box and then raise the canopy all the way to the ceiling. Raise the Lock Collar and thread onto ceiling Loop protruding through canopy.

Your installation is now complete. Return power to the junction box and test the fixture.

**Note:** Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

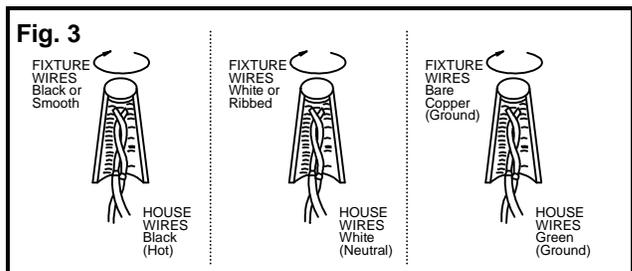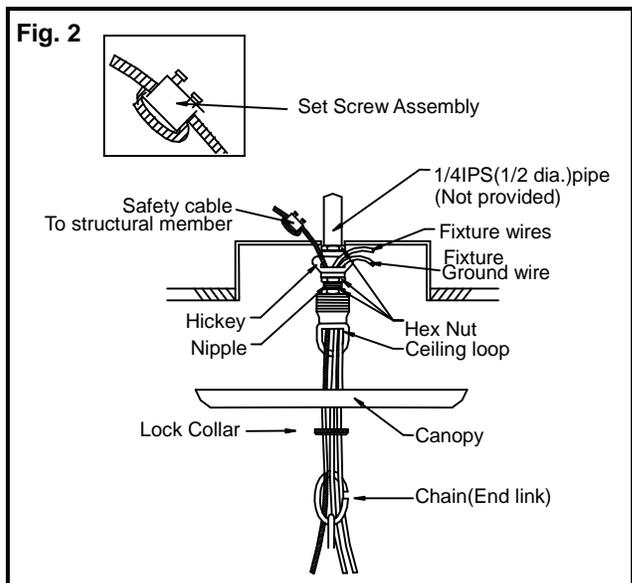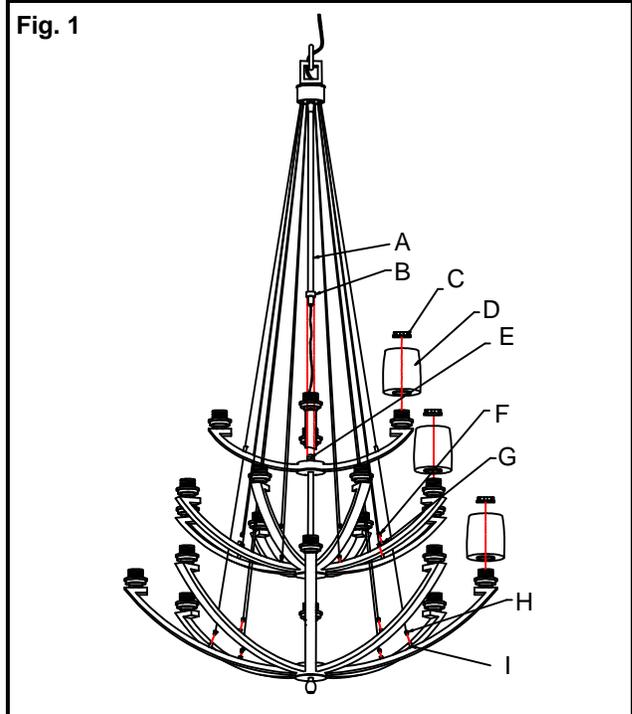

Notice: It is important to use proper chain pliers (not included) To OPEN and CLOSE the chain included with this fixture. Do not open them with other tools that may twist or stress the chain links. It is important to use proper chain pliers like the ones shown in the diagram.



american lighting association