

INSTALLATION INSTRUCTIONS

Item# 1359 (Rev. 05/10/2012)
READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR

ASSEMBLING THE FIXTURE (Fig.1)

- Carefully remove the fixture from the carton and check that all parts are included as shown in the illustration.
- Shut off power at the circuit breaker and remove old fixture including the mounting hardware.
- Secure the upper Poly Assembly (A) to Light Cluster Assembly (H), pull the wires from top Loop until taut.
- Align the pre-drilled holes on the Arm (B) to the Stud (I) on the bottom of upper Poly Assembly (A) and Point (K) on the top of upper Poly Assembly (A) and secure them with Cap Nut (J) and Thumb Screw (C) separately.
- Adjust the Arms (G1, G2 and G3) on the Light Cluster Assembly (H) to the proper position as shown in Fig.1.
- Screw the Finial (F) to the bottom of Light Cluster Assembly (H).
- Screw the Glass Shade (D) over the Socket Cup (E) by twisting it clockwise as shown in Fig.1
- Install the light bulbs (not included) in accordance with the fixture's specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**

HANGING THE FIXTURE (Fig. 2)

IMPORTANT: For a safe and secure installation, these fixtures must be installed by means of support that is independent of the outlet box.

SUGGESTED INSTALLATION:

- Provide a 1/4 IPS pipe with one end securely mounted to a beam or a structural member. The other end should protrude through the center of the outlet box as shown.
- Assemble the ceiling loop, nipple, nuts and hickey to center 1/4 IPS support pipe and adjust overall length to allow the ceiling loop to hold the canopy flush to the ceiling. When the adjustments have been completed, secure the three nuts, as shown.
- Attach the chain to the fixture loop. Slip the lock collar and canopy over the upper end of the chain. Open the end link of chain and lift the fixture to attach to the ceiling loop and secure the link.
- Lace the fixture wires, ground and safety cable through the chain and loop, exiting through the side of hickey. Run cable through the top of the outlet box and secure to structural member, locking with the set screw assembly.

CONNECTING THE WIRE (Fig. 3)

- At this point, connect the electrical wire as shown in figure 3, making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect the fixtures Ground Wire to it. If not, consult your electrician for proper grounding.
- Tuck these wire connections neatly into the ceiling junction box and then raise the canopy all the way to the ceiling. Raise the Lock Collar and thread onto ceiling Loop protruding through canopy.





Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

“U.S. Patents; D577,459; D579,143

This product is protected by United States Federal and/or State Law, including Patent and/or Copyright laws.”

© Minka Lighting, Inc.

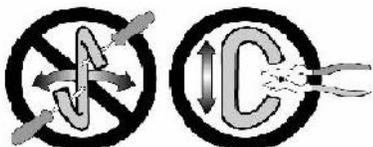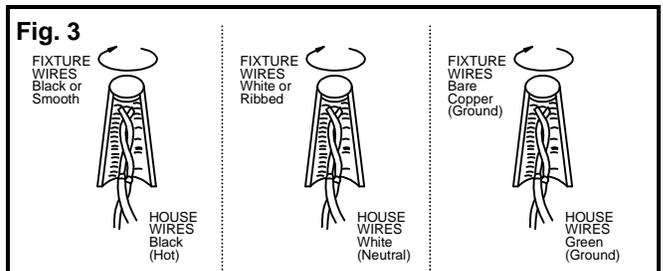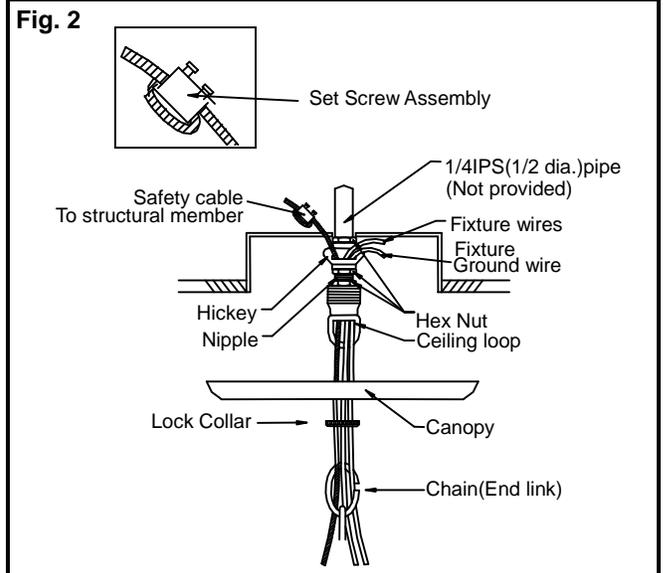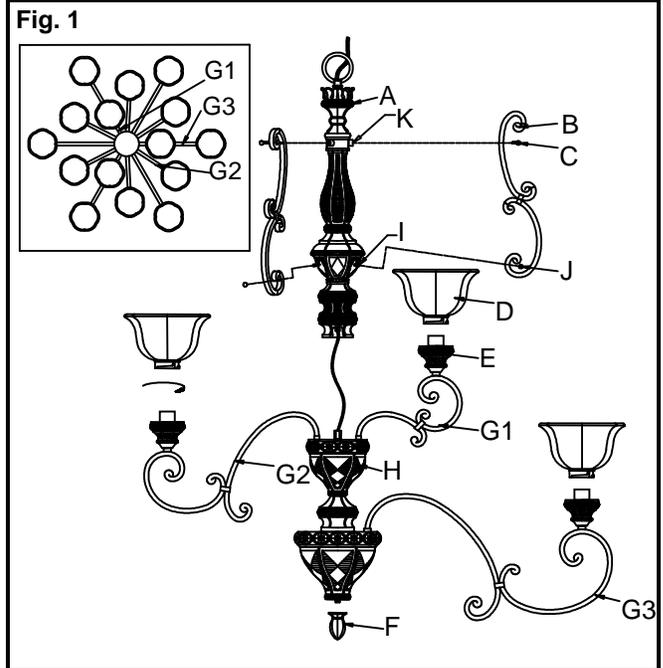

Notice: It is important to use proper chain pliers (not included) To OPEN and CLOSE the chain included with this fixture. Do not open them with other tools that may twist or stress the chain links. It is important to use proper chain pliers like the ones shown in the diagram.



LA-1411E