

INSTALLATION INSTRUCTIONS

Model # 688 (Rev. 06/27/2012)

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

ASSEMBLING THE FIXTURE (Fig. 1)

1. Carefully remove the fixture from the carton and check that all parts are included as shown in the illustration.
2. To prevent scratches to the shade, place the Large Ring (F) over a clean soft surface (blanket or rug), and then put the Large Alabaster Shade (E) over the Ring.
3. With the complete Light Assembly standing upright, engage the outside Drop Rods (B) to Housing (A) and secure with Lock Links.
4. Hold the complete Light Assembly over the Alabaster Shade. Engage the bottom ends of the Drop Rods (B) to the Loops on the Ring and secure with the Lock Links.

HANGING THE FIXTURE (Fig. 2)

5. Shut off power at the circuit breaker and remove old fixture including the crossbar.
6. Thread Nipple into Loop until snug.
7. Thread other end of Nipple with Loop attached into crossbar until snug.
8. Place Lock Washer over end of Nipple protruding through crossbar and thread Hex Nut onto nipple until tight.
9. Take this crossbar assembly and mount to ceiling junction box with junction box screws. Tighten screws securely with screwdriver.
10. By measuring determine correct number of links needed for proper hanging height.
11. Use a pair of pliers to open one end link of the chain, attach the chain to the fixture's loop, and close the link. Slip Loop Collar and Canopy over the chain. Open the other end link of the chain and lift the fixture to attach to the ceiling loop, close the chain link.
12. Lace the fixture's wires through the chain links and pull until taut. Feed the fixture wires through the loop and Nipple and pull until taut.

CONNECTING THE WIRES (Fig. 3)

13. At this point, connect the electrical wire as shown in figure 2, making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect the fixtures Ground Wire to it. Otherwise, connect the fixture Ground Wire directly to the crossbar using the Green Screw provided.
14. Tuck these wire connections neatly into the ceiling junction box and then raise the Lock Collar and thread onto ceiling Loop protruding through canopy.
15. Install the light bulbs in accordance with the fixture's specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
16. (Fig. 4) Mount the Glass Bulb Shields (H), by placing them over the Studs (J) located on the Support Plate (I) of the Light Cluster (K). Place Washers over the Studs (J) and tighten with Knurled Knobs (G).

INSTALLING THE BULB SHADES (Fig. 1)





17. Install Glass Shades (D) to Fixture Cups secure in place with Screw Shells (C). You are now ready to hang the fixture.

Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

© Minka Lighting, Inc.

This product is protected by United States Federal and/or State Law, including Patent and/or Copyright laws."

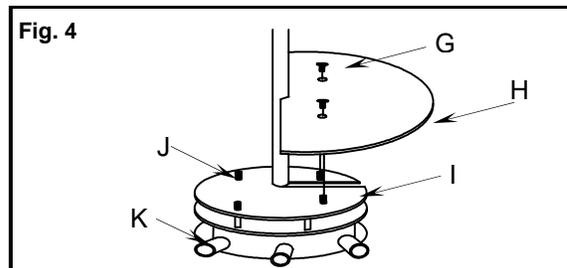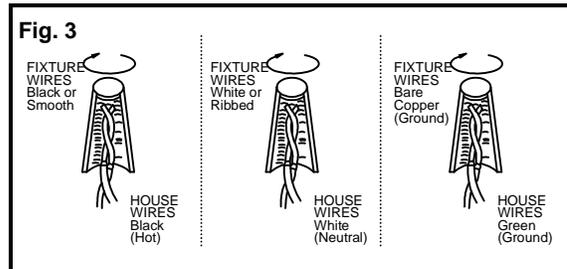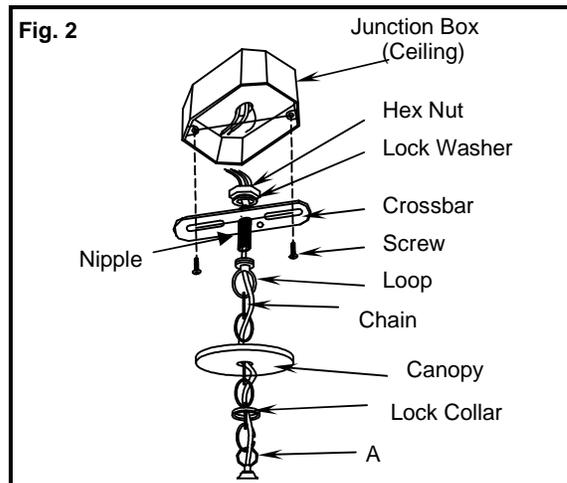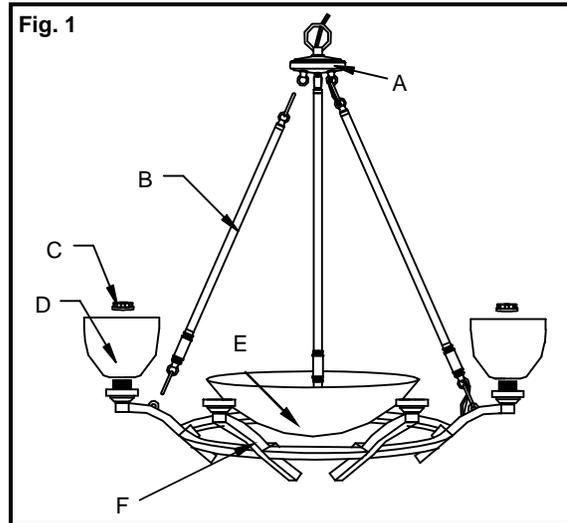

LA-580E

Notice: It is important to use proper chain pliers (not included) To OPEN and CLOSE the chain included with this fixture. Do not open them with other tools that may twist or stress the chain links. It is important to use proper chain pliers like the ones shown in the diagram.

