

INSTALLATION INSTRUCTIONS

Item #722 NEW(04/04/2006)

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

HANGING THE FIXTURE (Fig. 1)

1. Carefully remove the fixture from the carton and check that all parts are included as shown in the illustration.
2. Shut off power at the circuit breaker and remove old fixture including the crossbar.
3. Determine length desired and thread Bars (F) to Canopy (D) and Fixture Loop (G) to the desired length
4. Attach the Crossbar (A) to the Outlet box using Junction Box Screws (B) from the outlet box. The side of the Crossbar with "GND" marked on it and two convex points must face out.

CONNECTING THE WIRES (Fig. 2)

5. At this point, connect the electrical wire as shown in figure 2, making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect the fixture's Ground Wire to it. Otherwise, connect the fixture's Ground Wire directly to the crossbar using the Green Screw provided.
6. Secure Canopy (D) by threading Studs (C) 1/4" into the pre-drilled holes in the Crossbar (A) spaced at the same distances apart as the holes in the Canopy (D).
7. Carefully lift the Canopy (D) and through the Canopy's (D) pre-drilled holes to both Threading Studs (C). Secure Canopy against ceiling with Knurled Knobs (E).
8. Place Glass Shade (H) over Socket and secure with Screw Shell (I)
9. Install the light bulb in accordance with the fixture's specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!)**

Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig. 1


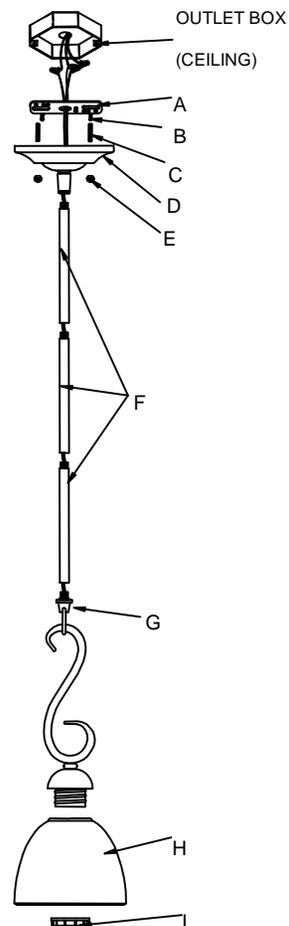


Fig. 2

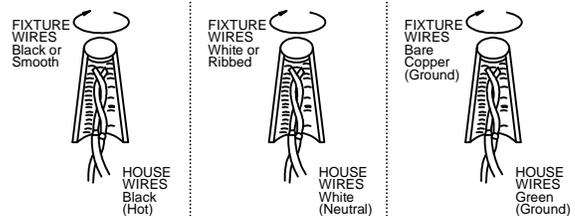

LA-989E