


INSTALLATION INSTRUCTIONS FOR 729

WARNING! SHUT OFF THE POWER AT FUSE OR CIRCUIT BREAKER.

ASSEMBLY THE FIXTURE


ASSEMBLY THE FIXTURE (Fig.1)

1. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
2. Thread the top threaded nipple into the bottom of the loop(A), turn until snug.
3. Spread the 9 fixture arms (B) to evenly position (See Fig.1).
4. Through the ball nut (C) to the hole on the top of the arm, tighten the ball nut to fix the arms (B) onto the fixture column (D).
5. Put the glass shade (E) over the socket cup.
6. Thread the socket ring (F) on to the socket and secure the glass shade.

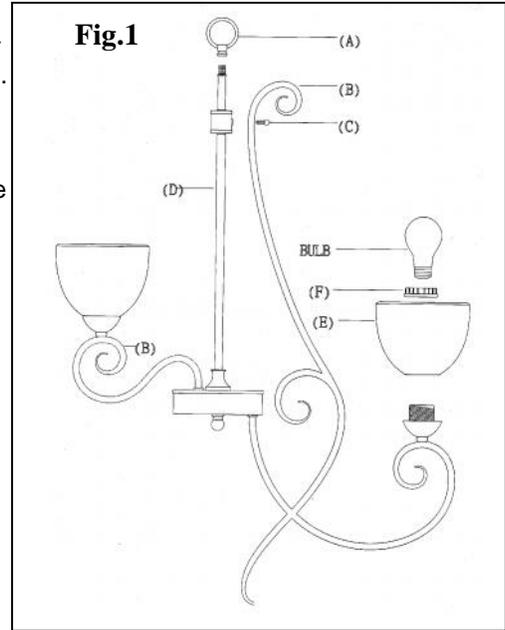

HANGING THE FIXTURE (Fig.3)

1. Shut off the power at the circuit breaker and remove old fixture from the ceiling, including the old cross bar.
2. Carefully unpack the new fixture and lay all the parts on a clear surface.
3. Thread the nipple (C) into loop (F) until snug.
4. Thread other end of nipple (C) with loop attached into crossbar (D) until snug.
5. Place lock washer (B) over end of nipple protruding through crossbar and thread hex nut (A) onto nipple until tight.
6. Take this crossbar assembly and mount to ceiling junction box with junction box screw (E). Tighten screws securely with screwdriver. The side of crossbar marked with "GND" must face out.
7. Use a pair of pliers to open one end link of the chain and connect to the fixture loop (J). Close the link.
8. By measuring, determine correct number of links needed for proper hanging height. Using pliers, Disconnect and discard remaining chain.
9. Lace the fixture wires through the chain.
10. Slip loop collar (H) over the chain, then do the same with canopy (G).
11. Open the other end link of the chain and connect to the ceiling loop (F). Close the link.
12. Feed the fixture wires through the loop (F) and nipple (C) and pull until taut.

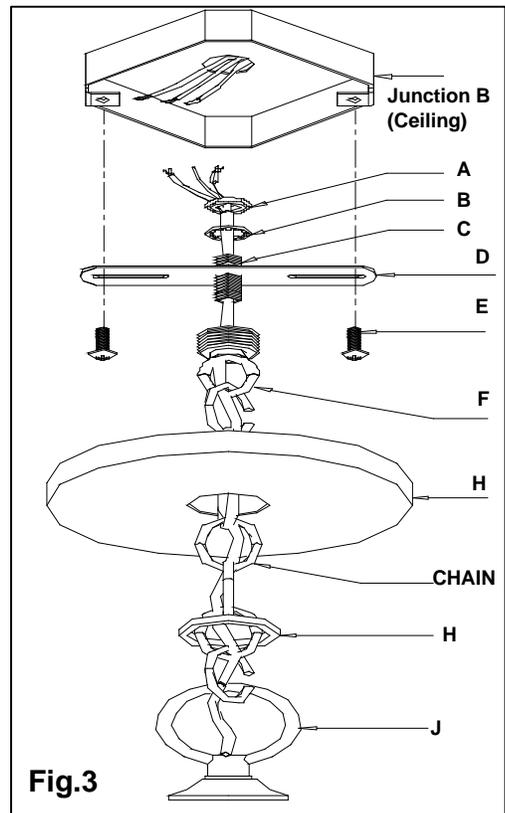

CONNECTING THE WIRE (See fig.2)

1. Take the black wire from the ceiling junction box and the smooth wire leg from the fixture and twist bare ends together. Twist wire connector onto end of wire until snug.
2. Repeat same process with white junction box wire and ribbed wire leg of fixture wire. NOTE :Twist wire together in the same direction you twist the wire connector onto wire.
3. If your junction box has a grounding wire (Green or bare copper), Attach this wire and the bare copper wire from the fixture together as step 1. If junction box has no ground wire. Attach the bare copper fixture wire to the green ground screw on the cross bar.
4. Tuck these wires connectors neatly into the ceiling outlet box and raise the loop (H) and thread onto ceiling loop protruding through canopy.

Your installation is now complete. Return power to the junction box and test the fixture.

