

INSTALLATION INSTRUCTIONS

Item#778 (New. 12/05/2011)

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

ASSEMBLING THE FIXTURE (Fig. 1)

1. Carefully remove the fixture from the carton and check that all parts are included as shown in the illustration.
2. Shut off the power at the circuit breaker (**avertissement! couper le courant au niveau des fusibles ou du disjoncteur**) and remove the old fixture including the mounting hardware.
3. Secure the upper column assembly (F) to the hex coupling (E), then turn the arms to the correct position.
4. Place the bottom of the top arms (B) through the square pin (D). Attach the top arms (B) to the upper column assembly (F) with ball screws (A).
5. Attach the bottom arms (N) to the fixture body (K) with ball screws (M).
6. Hook the crystal drops (J) onto the leaf (I).
7. Secure the finial (L) onto the fixture body (K).

HANGING THE FIXTURE (Fig. 2)

8. Thread the nipple (C) into ceiling loop (F) until snug.
9. Thread the other end of nipple (C) with ceiling loop attached into crossbar (D) until snug.
10. Place the lock washer (B) over the end of nipple protruding through crossbar and thread hex nut (A) onto nipple until tight.
11. Take this crossbar assembly and mount to ceiling junction box with junction box screw (E). Tighten screws securely with screwdriver. This side of crossbar marked with "GND" must face out.
12. Determine the correct number of links needed for the desired hanging height.
13. Use a pair of chain pliers to open one end link of the chain, attach the chain to the fixture loop (J), then close the link. Slip lock collar (H) followed by the canopy (G) over the chain.
14. Open the other end link of the chain and lift the fixture to attach to the ceiling loop (F), close the chain link.
15. Lace the fixture's wires through the chain links and pull until tight. Feed the fixture wires through the ceiling loop (F) and nipple (C) and pull until tight.

CONNECTING THE WIRE (Fig. 2 and Fig. 3)

16. At this point, connect the electrical wire as shown in figure 3, making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture ground wire directly to the crossbar using the green screw provided.
17. Tuck the wire connections neatly into the ceiling junction box and then raise the canopy (G) all the way to the ceiling. Raise the Loop Collar (H) thread onto the ceiling loop (F) protruding through canopy.

COMPLETING THE INSTALLATION (Fig.1)

18. Place the candle sleeve (G) over the socket (H). Install the light bulb(s) (not included) in accordance with the fixture's specifications. (**DO NOT EXCEED THE MAXIMUM WATTAGE RATING!**). (**NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!**) Clip the Fabric shade(s) (C) onto the bulb(s).

Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig. 1

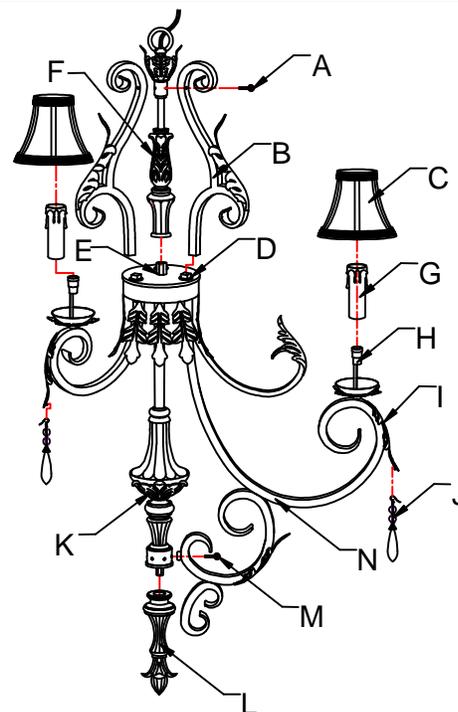


Fig. 2


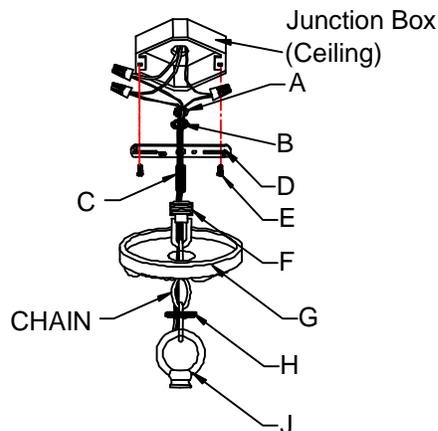


Fig. 3



Notice: It is important to use proper chain pliers (not included) To OPEN and CLOSE the chain included with this fixture. Do not open them with other tools that may twist or stress the chain links. It is important to use proper chain pliers like the ones shown in the diagram.

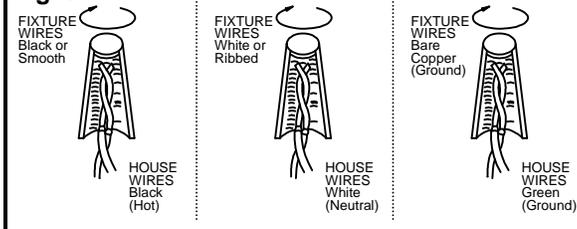

LA-2088E