

INSTALLATION INSTRUCTIONS

For Model 8616-A61

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

CONNECTING THE WIRES (Fig. 2)

1. Shut off power at the circuit breaker and remove the old fixture.
2. Pull black, white and ground wires out of the post.
3. Next, connect the electrical wires as shown in Fig. 2, while supporting the lantern. If your outlet has a ground wire (green or bare copper), connect the fixture's ground wire to it. If not, consult your electrician for proper grounding.

MOUNTING THE FIXTURE (Fig.1)

4. After wires are connected, tuck them carefully inside the post cup (E). Align the lantern with the post and secure with screws (F).
5. Install the bulb(s) in accordance with the fixture's specification. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!).**

ASSEMBLING THE FIXTURE (Fig. 1)

6. For installing the bulbs or replacing the bulbs at a later date, remove finial (A), top cap (B) and roof (C). After the installation, replace roof (C), top cap (B), (in sequence) and secure with finial (A).
7. For replacing the glass, follow step five which will also allow you access to the glass panels.
8. This fixture is UL Listed for wet location applications.

Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

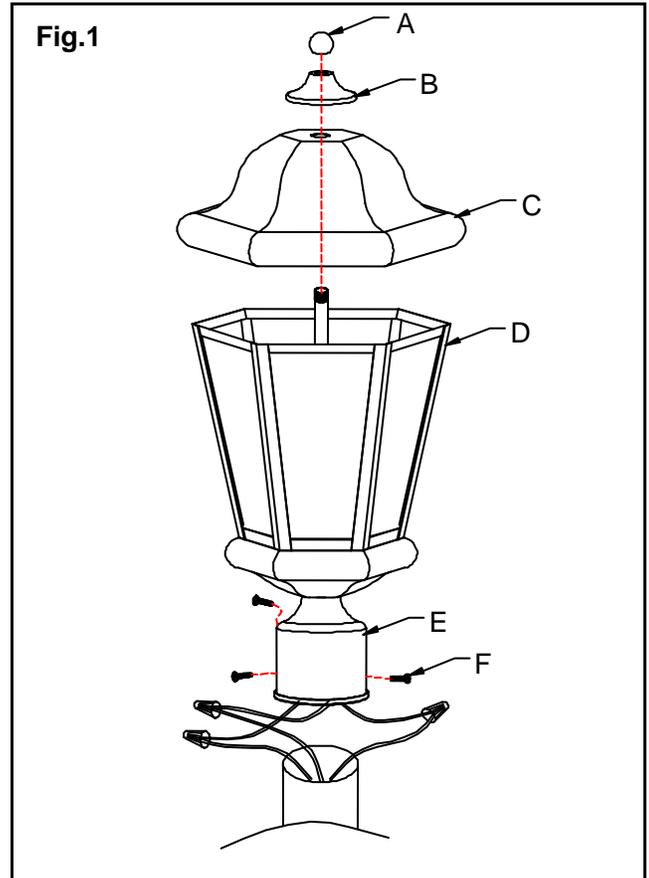


Fig. 2

