

# INSTALLATION INSTRUCTIONS

For Model 8954

READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

## HANGING THE FIXTURE (Fig. 1)

1. Shut off the power at the circuit breaker and remove old fixture, including the crossbar.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
3. Attach the cross bar (B) to the outlet box (A) (not supplied) using the 2(C) screws provided with the outlet box (A).

## 4. CONNECTING THE WIRES (Fig. 2)

At the point, connect the electrical wires as follows:

Connect the black wire from the fixture to the black (hot) house wire. Connect the white wire from the fixture to the white (neutral) house wire. Make sure all wire nuts are secured. You may wrap the connections with electrical tape. If your outlet has a ground wire (green or bare copper), connect fixture's ground wire to it. Otherwise, connect fixture's ground wire directly to the mounting strap by using the green screw provided. Tuck the wire connections neatly into the junction box.

5. Screw the collar loop (D) to the thread pipe from the mounting strap. Finally move up the canopy (E) through the chain to the ceiling and secured by screwing the thread ring(F) to the collar loop (D).(you can adjust the length of the chain if necessary)
6. Install bulbs. (Type-B. not supplied)
7. Attach cage (H) to the cover (G), and secure with **hex nut** (I) and the finial (J).
8. Turn on the power at fuse or circuit box.

**DO NOT EXCEED THE MAXIMUM WATTAGE RATING!**

Your installation is now complete. Return power to the junction box and test the fixture.

Fig. 1


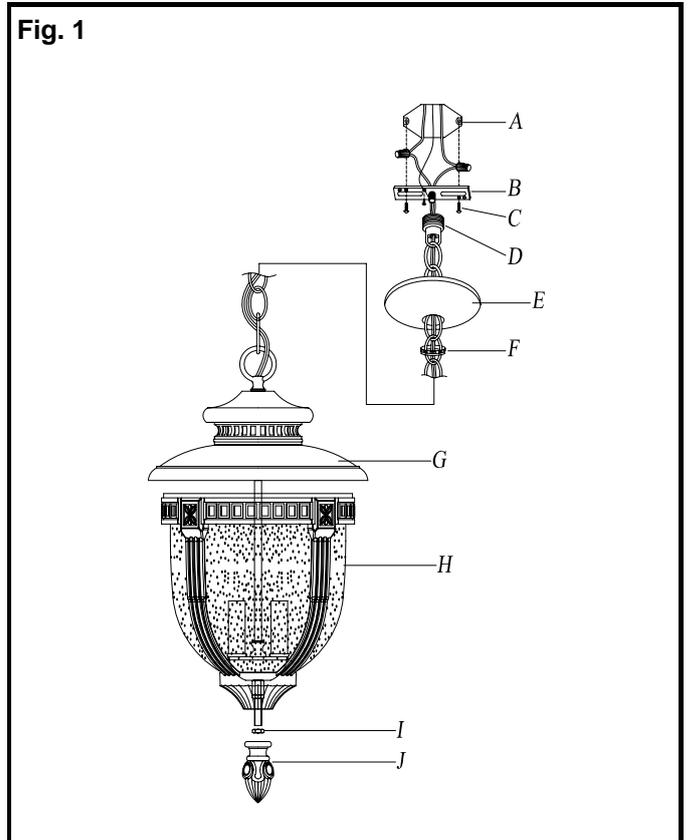


Fig. 2

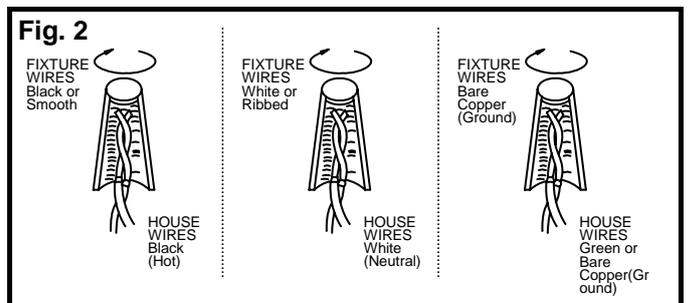

**Notice: It is important to use proper chain pliers (not included) To OPEN and CLOSE the chain included with this fixture. Do not open them with other tools that may twist or stress the chain links. It is important to use proper chain pliers like the ones shown in the diagram.**