

# INSTALLATION INSTRUCTIONS

For Model 8956

READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**  
**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

## HANGING THE FIXTURE (Fig. 1)



1. Shut off the power at the circuit breaker and remove the old fixture.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.

## CONNECTING THE WIRES (Fig. 2)

3. While supporting the lantern connect the electrical wires as shown in Fig. 2. If your outlet has a ground wire (green or bare copper), connect the fixture ground wire to it. If not, consult your electrician for proper grounding. After the wires are connected, tuck them carefully inside the post.

## COMPLETING THE INSTALLATION (Fig.1)

4. Place the fixture (F) onto post (H) (not supplied), and secure with the 3 mounting screws (G).
5. Screw the central pipe (I) to the socket cluster.
6. Install bulbs. (3-60W Type-B, not supplied). **DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
7. Attach the cover (E); decorative ring (D); decorative cover (C) onto the fixture (F) and secure with washer (J), hex nut (B), finial (A).
8. Turn on the power at fuse or circuit box.

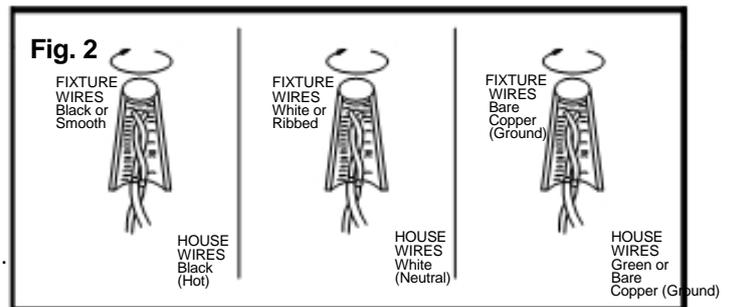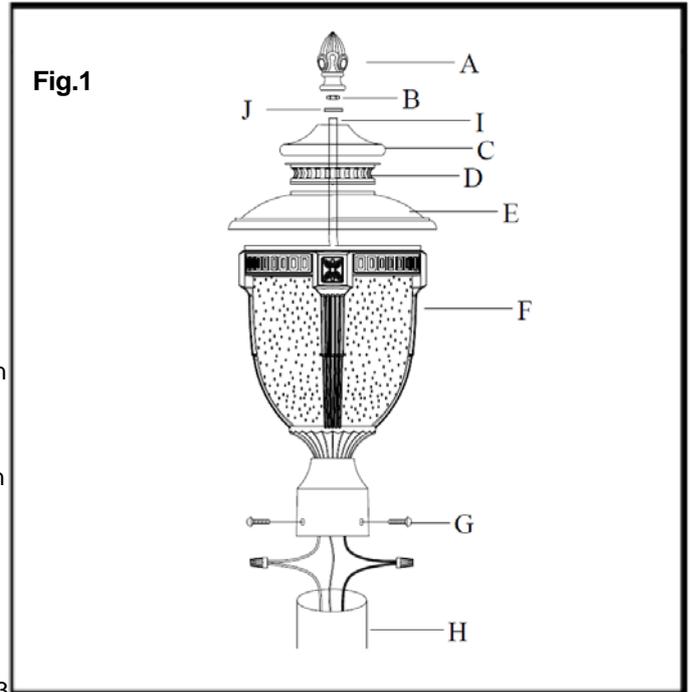

Your installation is now complete. Return power to the junction box and test the fixture.

