

INSTALLATION INSTRUCTIONS

For Model 9260-262

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

MOUNTING THE FIXTURE (Fig.1)

1. Shut off power at the circuit breaker and remove the old fixture, including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any parts necessary for installation.
3. Attach the mounting plate to the outlet box with the two outlet box screws as shown. The side of the mounting plate marked "GND" must face out.
4. Thread the mounting screws into the pre-drilled holes in the mounting plate spaced the same distance apart as the holes in the fixture.

CONNECTING ELECTRICAL (Fig.2)

5. Connect the electrical wires as shown in (Fig.2), making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect the fixture ground wire to it. Otherwise, connect the fixture ground wire directly to the mounting plate using the green screw provided.

COMPLETING THE INSTALLATION

6. Align the fixture to the mounting screws on the mounting plate and secure with knurled knobs (Fig1).
7. To prevent moisture from entering the outlet box and causing a short, use clear caulking (i.e. Indoor/Outdoor Silicone Sealant) to outline the outside off fixture back-plate where it meets the wall leaving a space at bottom to allow moisture a means to escape (Fig3).
8. Install the glass (F) with glass retainer clips (E), Install the 1*60w A19 light bulb in accordance with the fixtures specification. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!)**
9. Secure lamp frame (D) to top cover (C) with rubber washer (B) and knurled knobs (A).

Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased

Fig.1

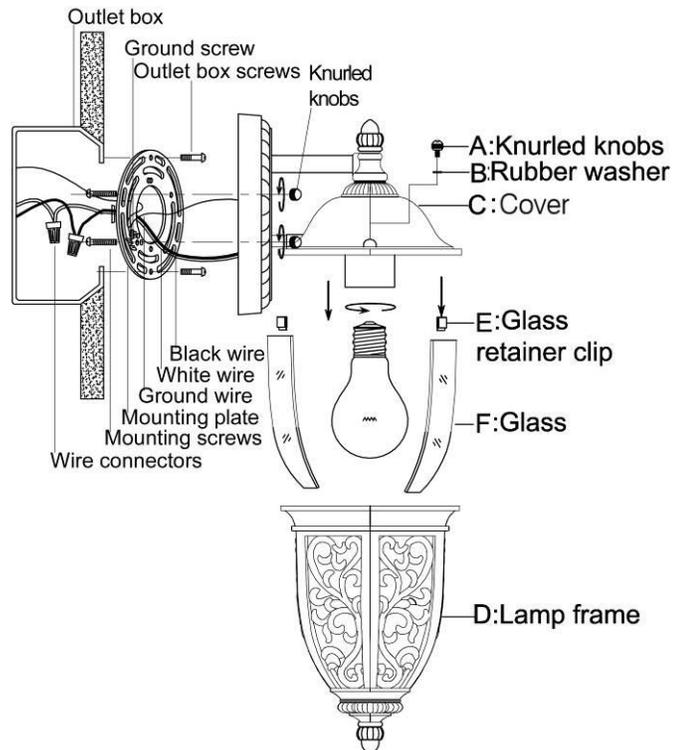


Fig. 2

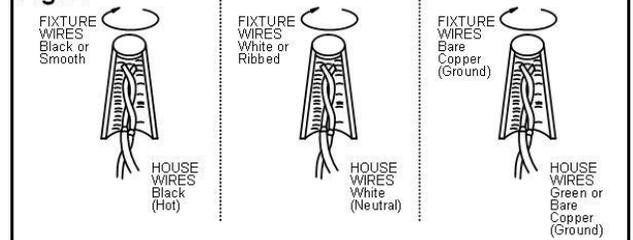


Fig.3

