

INSTALLATION INSTRUCTIONS

Model # 9264-262

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

MOUNTING THE FIXTURE (FIG. 1)

1. Shut off the power at the fuse box or circuit breaker box and remove the old fixture from the ceiling, including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to misplace any small parts necessary for installation.
3. Determine the desired hanging height. Using a pair of proper chain pliers disconnect and discard the excess chain.
4. Open one end of the chain (G) and attach it to loop (F).
5. Slip loop collar (I) followed by the canopy (J) over the chain.
6. Thread nipple (K) into ceiling loop (H) until snug.
7. Thread the other end of nipple (K) with loop (H) attached into cross-bar (N). The length of nipple (K) into cross-bar (N) may be adjusted.
8. Secure nipple (K) to cross-bar (N) with lock washer (M) and hex nut (L).
9. Open the other end link of the chain (G) and attach it to loop (H).
10. Feed the fixture wires through the chain (G) loop (H), canopy (J) and nipple (K).
11. While supporting the fixture, attach the cross-bar assembly to the outlet box (Q) with outlet box screws (P).

CONNECTING THE WIRES (FIG. 2)

12. At this point, connect the electrical wires as shown in Fig. 2 making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), attach this wire and the bare copper wire from the fixture together. Otherwise, attach the fixture ground wire to the crossbar using the green screw (O) provided.
13. Tuck the wire connections neatly into the ceiling outlet box.

COMPLETING THE INSTALLATION (FIG. 1)

14. Raise the canopy (J) all the way to the ceiling and secure with lock collar (I).
15. Fix the glass (C) to lamp frame (B) with glass retainer clips (D). Install 3*60w B10.5 bulbs in accordance with the fixture's specification—**DO NOT EXCEED THE MAXIMUM WATTAGE RAITTING!**
16. Secure lamp frame (B) to top cover (E) with finial (A).

Your installation is now complete. Return power to the outlet box and test the fixture.

Fig. 1



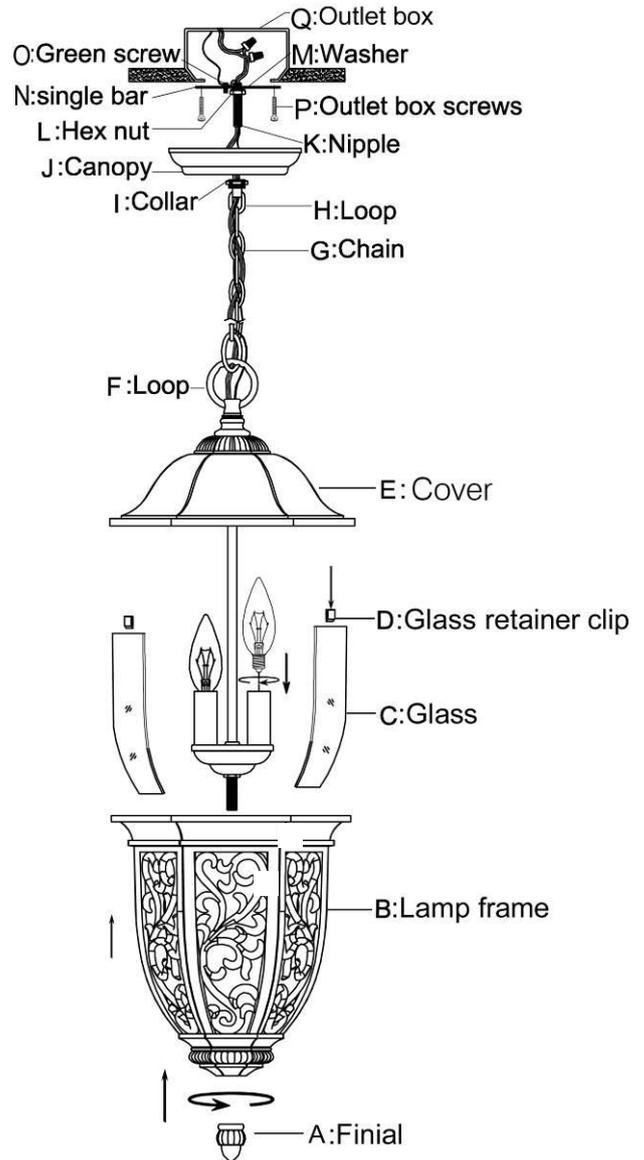


Fig.2

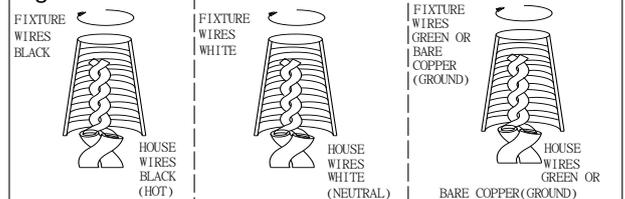

“CAUTION-RISK OF FIRE CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR”



Notice: It is important to use proper chain pliers (not included) to OPEN and CLOSE the chain included with this fixture. Do not open them with other tools that may twist or stress the chain links. It is important to use proper chain pliers like the ones shown in the diagram.