

INSTALLATION INSTRUCTIONS

Model # 9266-262

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

PREPARING FOR INSTALLATION (Fig. 1)

1. Shut off power at the circuit breaker and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clear area. Take care not to misplace any small parts necessary for installation.


CONNECTING THE WIRES (Fig. 2)

3. Connect electrical wires while supporting the lantern. If your post has a ground wire (green or bare copper), connect the fixture ground wire to it. If not, consult your electrician for proper grounding. After wires are connected, tuck them carefully inside the post cup (I). Align the lantern with post (L) and secure with screws (J). (Fig.1&2)

COMPLETING THE INSTALLATION (Fig. 1)

4. Install the 2*60w B10.5 light bulbs in accordance with the fixture specification. **DO NOT EXCEED THE MAXIMUM WATTAGE RATING!**
5. Fix the glass (G) to lamp frame (H) with glass retainer clips (F),
6. Thread centre rod (E) into lamp frame (H).
7. Align cover (D) and cap (C) to centre rod (E) and secure with rubber washers (B) and finial (A)

Your installation is now complete. Return power to and test the fixture.

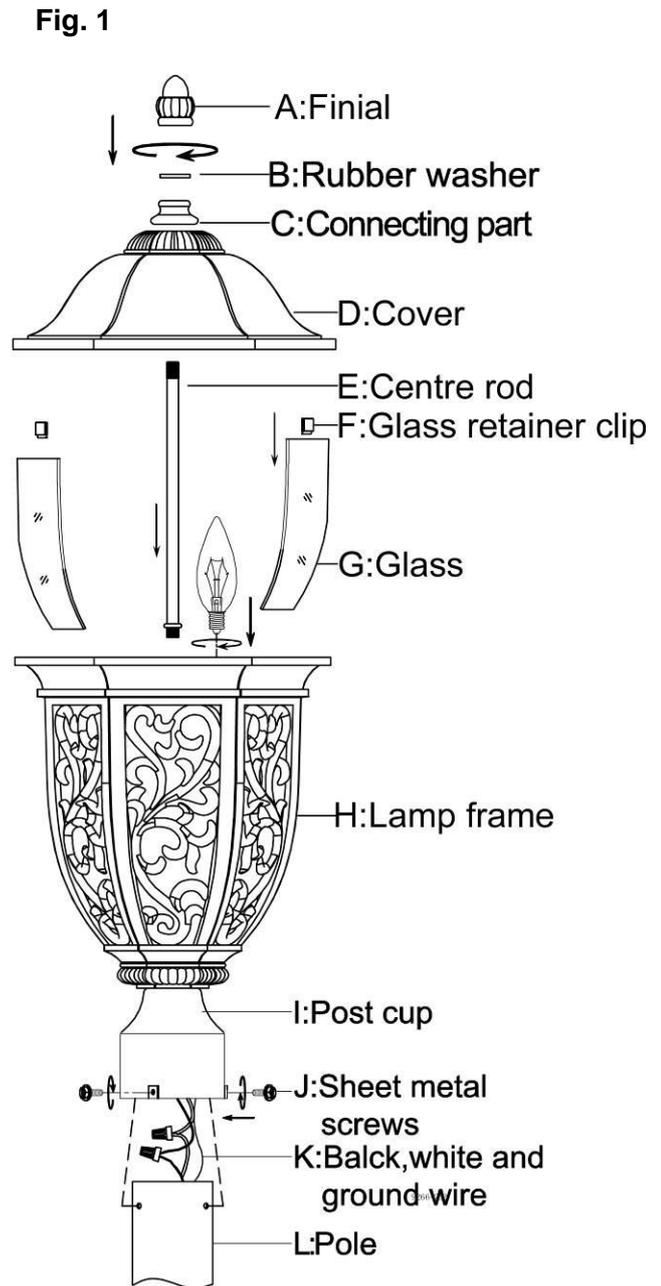

“CAUTION-RISK OF FIRE CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR”

