INSTALLATION INSTRUCTIONS FOR 1553-477

For Wall Mount Fixture

OMinka Lighting, Inc.

This product is protected by United States Federal and/or

State Law, including Patent and/or Copyright laws.

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER. AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.


MOUNTING THE FIXTURE


Installation (see fig.1)

- Shut off the power at the circuit breaker and remove old fixture, including the crossbar.
- Attach the crossbar to the junction box using two junction box screw. The side of the crossbar marked "GND" must face out.
- Thread the nipple part way into the center hole of the crossbar and secure with hex nut.
- 4. Follow wiring instructions carefully (see fig. 2)
- Place the fixture over the nipple, then tighten it with cap nut (B).
- 6.Protrude the pipe (F) through hex nut (E), the washer (M), the hole of bracket (A), and the washer (D) over pipe (F), then screw the hex nut (C) onto pipe (F).
- 7.Raise glass shade (G) to main body, aligning glass hole with pipe (F), attach rubber cushion (H) and the washer (I), then screw it with hex nut (J). attach the finial base (K) to the end of pipe (F) and tighten firmly with finial (L).
- Install the light bulbs (not included) in accordance with the fixture's specifications: DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)

Wiring (see fig.2)

- 1. Connect the electrical wires as follows. Connect the black wire from the fixture to the black house (hot) Wire. Connect the white wire from the fixture to the white (neutral) house wire. Make sure all wire nuts are secured. You may wrap the connections with electrical tape. If your outlet box has a ground wire (green or bare copper) connect fixture's ground wire to it. Otherwise attach the bare copper fixture wire to the green ground screw on the crossbar.
- Tuck the wire connections neatly into the wall junction box.

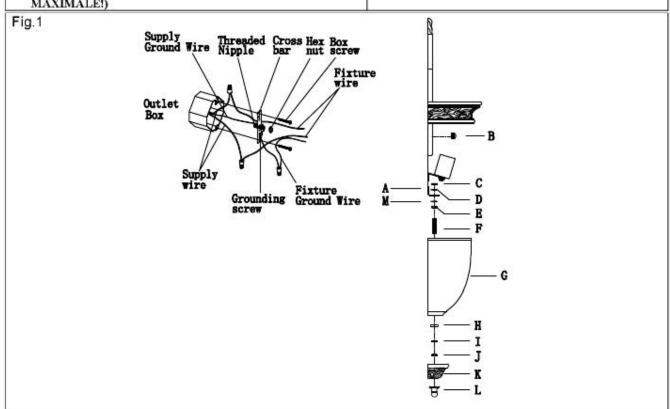

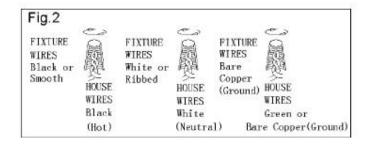

MIN 90°C SUPPLY CONDUCTORS



